LANDSCAPE, BUFFER AND TREE PROTECTION CONCEPT — SCALE 1" = 60' (site-local coordinates: +u along the strip to the NW, +v across toward the NE line; see north arrow)

CONCEPT — TO BE SEALED BY A REGISTERED LANDSCAPE ARCHITECT, FORESTER OR ARBORIST (CHECKLIST §6.a)

LANDSCAPE, BUFFER AND TREE-PROTECTION REQUIREMENTS — REQUIRED vs. PROVIDED

CLAUSE	REQUIREMENT (CHECKLIST §6)	BASIS AND ARITHMETIC	PROVIDED ON THIS SHEET	STATUS
§6.a	Tree protection / buffer / landscape plan sealed by a Registered Landscape Architect, forester or arborist	Checklist §6.a — a seal, not a calculation	CONCEPT, NOT SEALED — this sheet is the owner's pre-application concept; the sealed plan is submitted with the Land Disturbance Permit	open — LDP
§6.b	Show and label the boundary AND dimensions of buffers; label undisturbed; confirm buffers abutting residential property	Table 4.1 buffer abutting R-1 = 20'-0"; perimeter (all lines except the Arcado Rd frontage) = 3,725 lf	20'-0" band drawn, dimensioned in 5 places and labelled UNDISTURBED; 73,697 SF. All 3 buffered lines abut R-1 (Lilburn) single-family property	appears consistent with
§6.c	If a portion of the required buffer is within an easement, provide 25 ft of additional buffer outside the easement	The existing 8-in Gwinnett DWR sewer lies 7–13 ft inside the SW line from u −36 to u 272 = 308 lf of the required buffer	25'-0" additional buffer carried over 97 lf (u 60–157) inside the amenity tract = 2,425 SF; the remaining 211 lf is an open item — see note 4	PARTIAL — determination requested
§6.f	Buffer encroachments (swales, stormwater facilities, sanitary sewer, easements) as near perpendicular as possible, 50 ft maximum width	Measured from the SW property line to the top of bank of each basin and to the entrance curb return	Pond 1 top of bank 41'-5" clear of the property line; Pond 2 28'-7" — neither enters the buffer. Only encroachment: the SW curb return, 2'-0" wide (0.1 SF) — under the 50-ft maximum. No ZBA variance requested	appears consistent with
§6.g	Delineate tree-protection areas; preserve specimen trees and trees over 5-in caliper in buffers, strips and islands; add the detail and the note	Limit of disturbance = the buffer inner line + the outer line of the 50-ft undisturbed stream buffer	Fence line drawn (3,972 lf), DETAIL 1 provided, and the required note printed verbatim in note 14	appears consistent with
§6.h	Supplemental buffer planting where screening is required: trees 6 ft minimum at planting, to reach 20 ft minimum at maturity	One mapped screen gap: the mown yard at 4541 and the maintained sewer corridor, SW line u −36 to 272 = 308 lf. Rate (docs/12 §32 93 00 2.03): 1 evergreen per 8–10 lf + 1 canopy per 30–40 lf	308 lf ÷ 8 = 38.5 → 39 evergreens at 8'-0" o.c. double staggered; 308 ÷ 35 = 8.8 → 9 canopy trees at 34'-3" o.c. All 6'-0"–8'-0" at planting; mature 15'-0"–40'-0"	appears consistent with
§6.i	Minimum 16 Tree Density Units per acre — "unless SFR subdivision"	41 detached single-family cottage lots; §602 use "Single-family (cluster-cottage, creative lot configuration)", P in R-2	NOT REQUIRED AND NOT PROVIDED — this is a single-family-residential subdivision. No TDU credit is claimed for any tree on this sheet	not applicable
§6.i	Landscaping data in tabular form: common and botanical names, quantities, spacing, percentage of each (not to exceed 33 %), size, height, diameter and condition	Every symbol drawn on this sheet is counted; the schedule is generated from the plan	PLANT SCHEDULE: 13 species, 166 plants. Largest single species 16.9 % (MC) — under the 33 % maximum	appears consistent with
§6.j	10-ft landscape strip adjacent to all rights-of-way: 1 tree and 1 shrub per 25 linear feet of frontage	Arcado Rd frontage 237.62 lf (data/layout.json metrics.frontage_arcado_along_rw_ft) ÷ 25 = 9.50 → 10 trees and 10 shrubs	10 trees (8 in the strip at 16'-11" o.c. + 2 relocated immediately behind the strip — see note 7) and 10 shrubs. Strip area 2,370 SF	appears consistent with
§6.j	Woody native plant, single trunk, planted 6 ft minimum height to reach 20 ft minimum; or a flowering tree 6 ft minimum height	Overhead distribution on the Arcado Rd frontage is UNVERIFIED — see note 13	Strip row: Cercis canadensis and Amelanchier arborea, 6'-0"–8'-0" at planting, 15'-0"–30'-0" at maturity (the flowering-tree option). Relocated pair: Quercus lyrata, 4-in caliper	appears consistent with
§6.j	No landscaping 3 ft to 15 ft in height within 20 ft of a right-of-way intersection	Two 20 ft × 20 ft triangles at the entrance, one each side of the drive, measured from the ends of the curb returns along the Arcado Rd R/W and along the drive edge	Triangles drawn and hatched; NO TREE is placed in either. The 2 shrubs inside them are Itea virginica 'Little Henry', 18–24 in at planting, maintained at 30 in maximum	appears consistent with
§6.k	Parking-lot planting where more than 5 spaces: 1 tree for each 7 parking spaces	8 guest spaces + 4 mail-kiosk spaces = 12 ÷ 7 = 1.71 → 2 trees	2 canopy trees (Nyssa sylvatica) in two dedicated islands between the guest bay and the kiosk bay. No buffer or landscape-strip tree is counted here	appears consistent with
§6.k	Demonstrate visually that every parking space is within 60 ft of the trunk of a tree	60'-0" radii drawn about both trunks on the plan and on Enlargement A; every stall corner tested against both trunks	Worst measured distance from any stall corner to the nearer trunk = 36'-2". All 12 spaces are inside both radii	appears consistent with
§6.k.a	Canopy tree minimum planting area 200 SF	Two islands 20'-0" × 10'-0"	200 SF each, one tree per island, no sharing	appears consistent with
§6.l	Five-foot landscape strip around all accessory structures, including utility maintenance structures, ground-level HVAC, storage buildings and loading	Accessory structures on the plan: mail kiosk (CBU), two pickleball court pads, and the clubhouse ground-mounted HVAC pad	4 strips drawn at 5'-0" and planted with 37 shrubs. Where the strip at the SW court pad overlaps the 20-ft buffer by 3'-0" it is satisfied by the buffer planting; no grading occurs in the buffer	appears consistent with
§6.m	Certificate-of-occupancy and 12-month warranty note	Prescribed wording	Printed verbatim as note 12	appears consistent with
§6.n	Check for utility lines — provide alternate low / slow-growing trees or setbacks for trees from overhead power	Georgia Power "Tree planting near utility lines" right-tree/right-place zones	Frontage row held to 25 ft mature height pending a Georgia Power / Georgia 811 field locate; no canopy tree within 20 ft of a conductor — see note 13	VERIFY — field locate required

PLANT SCHEDULE — Checklist §6.i: common and botanical names, quantity, spacing, percentage of total, size, height, caliper and root condition

KEY	COMMON NAME	BOTANICAL NAME	QTY	SPACING / ON CENTRE	% OF TOTAL	CALIPER / SIZE	HT. AT PLANTING	MATURE HT.	ROOT COND.	USE ON THIS SHEET
QP	Willow Oak	Quercus phellos	15	40'-0" o.c. avg.	9.0 %	3 in cal.	12–14 ft	60–75 ft	B&B	Lane street tree
QS	Shumard Oak	Quercus shumardii	15	40'-0" o.c. avg.	9.0 %	3 in cal.	12–14 ft	55–80 ft	B&B	Lane street tree
UP	Lacebark Elm 'Allee'	Ulmus parvifolia	15	40'-0" o.c. avg.	9.0 %	3 in cal.	12–14 ft	40–50 ft	B&B	Lane street tree
NS	Black Gum	Nyssa sylvatica	16	1 per 7 spaces; 40'-0" o.c. avg.	9.6 %	3 in cal.	12–14 ft	30–50 ft	B&B	Lane street tree / parking island
QL	Overcup Oak	Quercus lyrata	2	as shown	1.2 %	4 in cal.	14–16 ft	35–45 ft	B&B	Arcado Rd strip — relocated behind the strip
QA	White Oak	Quercus alba	9	34'-3" o.c.	5.4 %	2.5–3 in cal.	10–12 ft	50–80 ft	B&B	Buffer supplement
CC	Eastern Redbud	Cercis canadensis	4	16'-11" o.c.	2.4 %	1.5–2 in cal.	6–8 ft	20–30 ft	B&B	Arcado Rd landscape strip
AA	Downy Serviceberry	Amelanchier arborea	4	16'-11" o.c.	2.4 %	1.5–2 in cal.	6–8 ft	15–25 ft	B&B	Arcado Rd landscape strip
IO	American Holly	Ilex opaca	20	8'-0" o.c., double staggered	12.0 %	n/a — single leader	6–8 ft	15–30 ft	B&B	Buffer supplement screen
JV	Eastern Red Cedar	Juniperus virginiana	19	8'-0" o.c., double staggered	11.4 %	n/a	6–8 ft	30–40 ft	B&B	Buffer supplement screen
IG	Inkberry 'Shamrock'	Ilex glabra	17	14'-0" o.c. avg.; 14'-5" o.c. avg.; 17'-4" o.c	10.2 %	n/a — 7 gal.	24–30 in	4–6 ft	Container	Arcado Rd strip; accessory-structure strip
IV	Sweetspire 'Little Henry'	Itea virginica	2	17'-4" o.c. avg.	1.2 %	n/a — 3 gal.	18–24 in	2–3 ft	Container	Strip within the sight triangle — 30 in max. maintained
MC	Wax Myrtle	Morella cerifera	28	14'-3" o.c. avg.	16.9 %	n/a — 7 gal.	36–42 in	10–15 ft	Container	Screen at the pickleball court pads
	TOTAL — 13 species		166		100.0 %			largest species 16.9 % ≤ 33 %		

Quantities are counted from the symbols actually drawn on this sheet, so the schedule cannot disagree with the plan. Percentages are of the 166-plant total; the largest single species is 16.9 %, under the 33 % maximum of Checklist §6.i. B&B = balled and burlapped; nursery stock to ANSI Z60.1-2014. Per-cottage foundation and porch planting is HOA-installed and is not tabulated (note 11). Final species selection is the Landscape Architect's.

LEGEND — every symbol drawn on this sheet appears here, and no unused entry appears (audit-2026-09-03/drawing-standards.md §3.2)

- Assemblage boundary (Gwinnett GIS — DRAFT)
- Adjoining tax parcel — all zoned R-1, City of Lilburn
- Arcado Rd right-of-way line (R/W width varies)
- Existing road centreline
- 20'-0" undisturbed buffer — existing woodland retained
- Buffer inner line = limit of disturbance
- 25'-0" additional buffer (checklist §6.c)
- Supplemental buffer planting zone (§6.h)
- Existing 20' sanitary sewer easement in the buffer
- 10'-0" landscape strip along the Arcado Rd R/W (§6.j)
- Sight triangle — no landscaping 3'-0"–15'-0" (§6.j)
- Parking-lot planting island, 200 SF min. (§6.k.a)
- 60'-0" radius from a parking-lot tree trunk (§6.k)
- 5'-0" strip at accessory structures / ground HVAC (§6.l)
- Tree protection fence — install before land disturbance
- Proposed canopy / street tree (see PLANT SCHEDULE)
- Proposed understory / flowering tree
- Proposed evergreen screen tree
- Proposed shrub
- Stream — state waters (top of bank approximate)
- 25' state (GA EPD) stream buffer
- 50' undisturbed stream buffer (Lilburn)
- 75' impervious setback
- Open-space, amenity, village-green and pond tract (context)
- Detention / water-quality basin (context — Sheet C-3.0)
- Proposed lot (context — Sheet C-2.0)
- Proposed cottage, garage and porch (context)
- Private lane, entry drive, driveway and parking pavement
- Sidewalk (context)
- Clubhouse, mail kiosk, court pad and monument sign (context)
- Match line — enlargement at 1" = 20'

ENLARGEMENT B — TYPICAL BUFFER SECTION, PERIMETER LOT (SCALE 1" = 20')

Looking along the SW property line; horizontal and vertical scales are equal (no exaggeration).

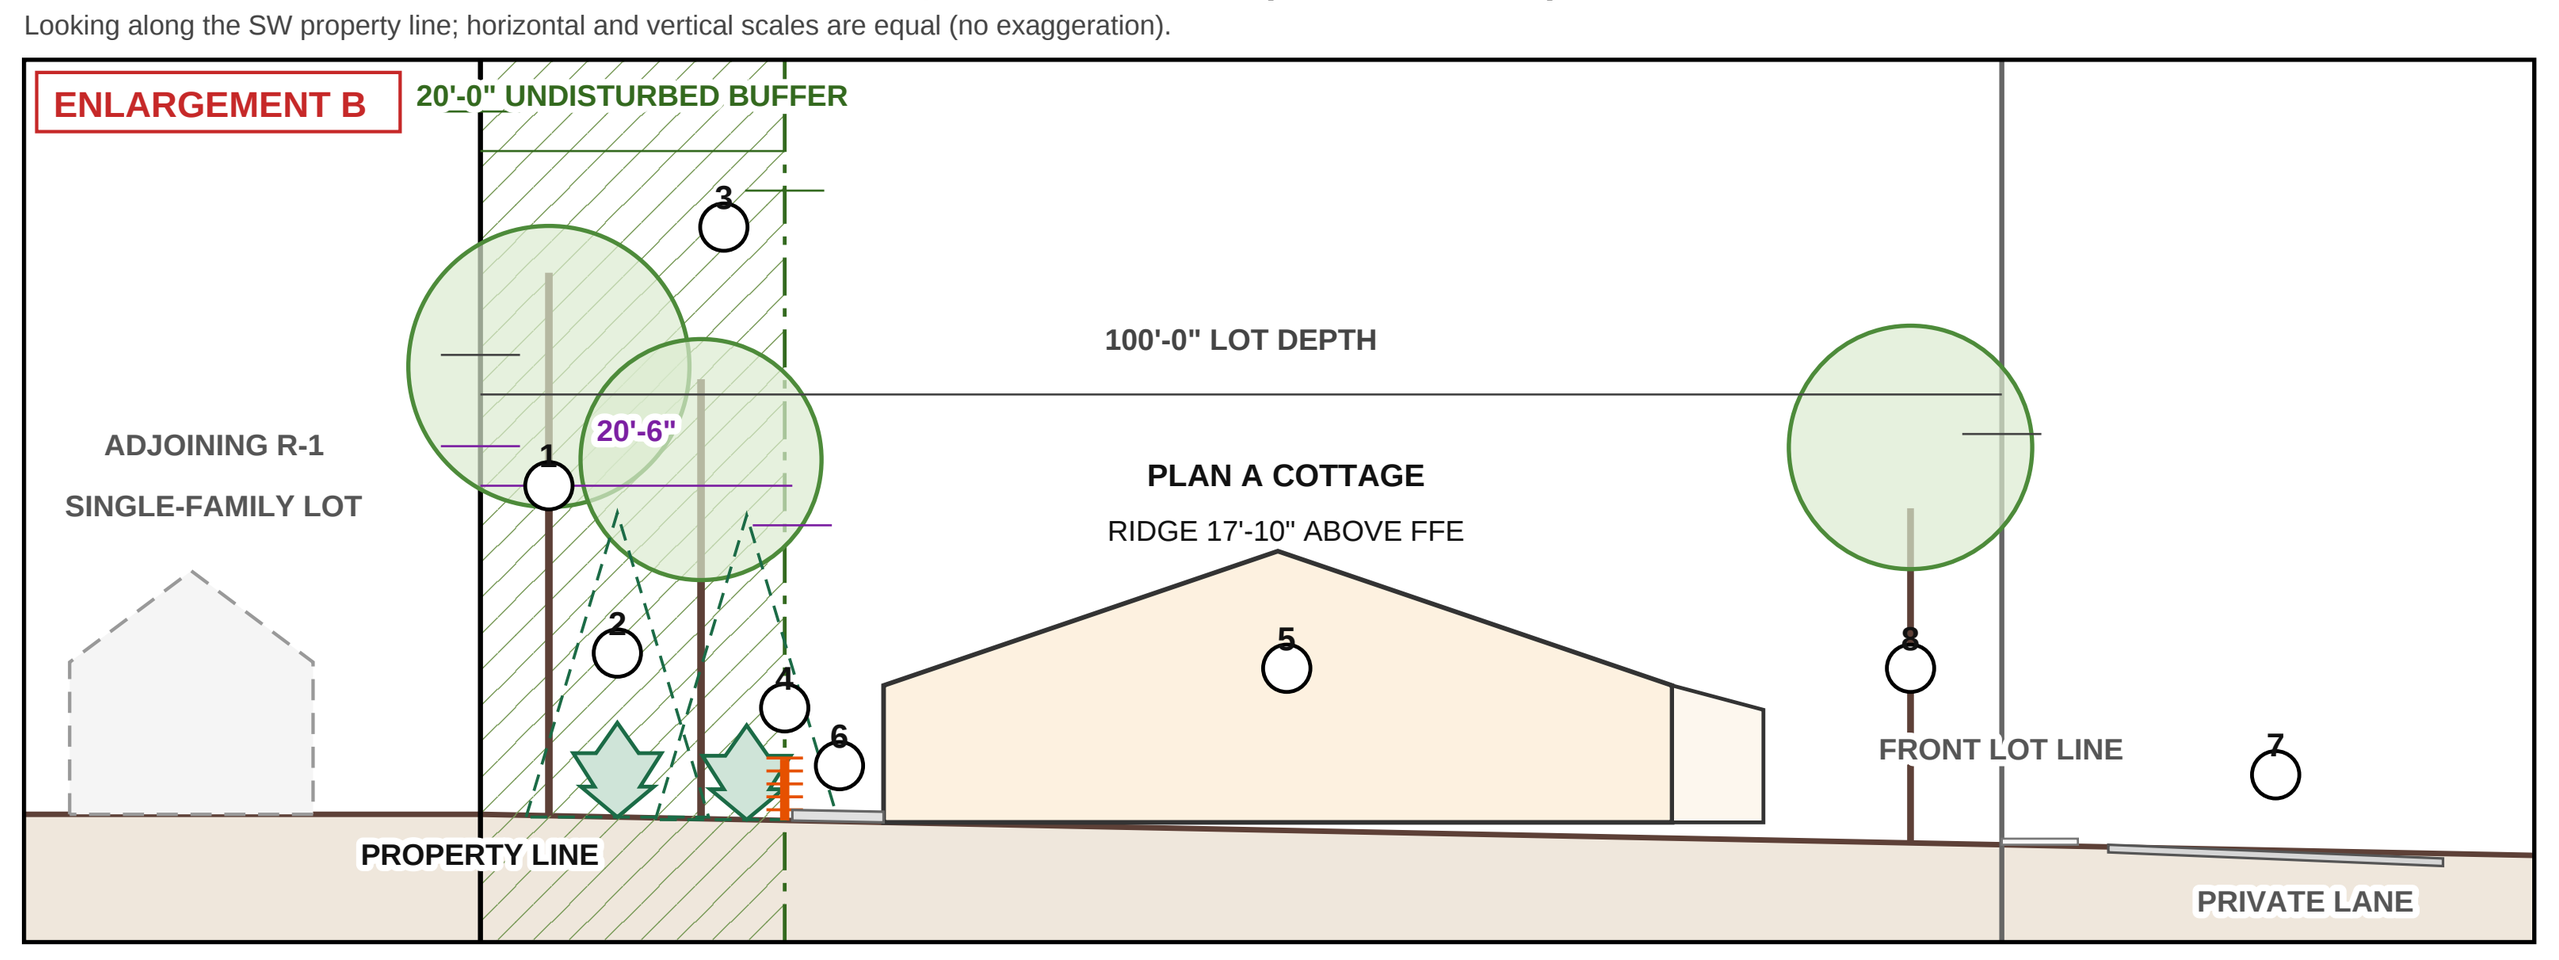

KEY TO ENLARGEMENT B

1. Existing canopy retained. No clearing, grading, filling, paving, storage or mowing occurs inside the buffer; dead, diseased or hazardous material is removed by hand under an arborist.
2. Supplemental evergreen where the existing screen is thin — 6'-0" minimum height at planting, 20'-0" minimum at maturity (Checklist §6.h). Dashed outline = mature form.
3. 20'-0" undisturbed buffer = the rear 20 ft of the lot, held in a RECORDED BUFFER EASEMENT (Ord. 2023-603 §313(1)) shown on the final plat — see note 3.
4. Tree protection fence at the limit of disturbance — DETAIL 1. Install before any land disturbing activity (§6.g).
5. Plan A cottage, 1 story, ridge 17'-10" above FFE; rear wall 26'-6" and front porch face 84'-4" from the rear lot line (data/plans.json, read at run time).
6. 6'-0" rear patio. Its edge is 20'-6" from the rear lot line — 0'-6" clear of the buffer easement line, the tightest clearance between built work and the buffer on the plan.
7. 5'-0" sidewalk, 2'-0" strip and 22'-0" private lane pavement in the HOA lane tract.
8. Lane street tree at 40'-0" o.c., set 6'-0" behind the front lot line in a street-tree easement; where the tract widens to 36'-0" the tree may stand in a 6'-0" strip between curb and walk (Checklist §319 sidewalk note).

0 — 20 — 40 — 60 ft
GRAPHIC SCALE 1" = 20'

ENLARGEMENT A — ARCADO ROAD FRONTAGE LANDSCAPE STRIP, ENTRANCE SIGHT TRIANGLES AND AMENITY-BLOCK PLANTING (SCALE 1" = 20')

Same data and the same site-local coordinates as the plan above; u -50 to 230, v -245 to 15. The 60-ft parking radii run past the right-hand match line and are shown complete on the plan.

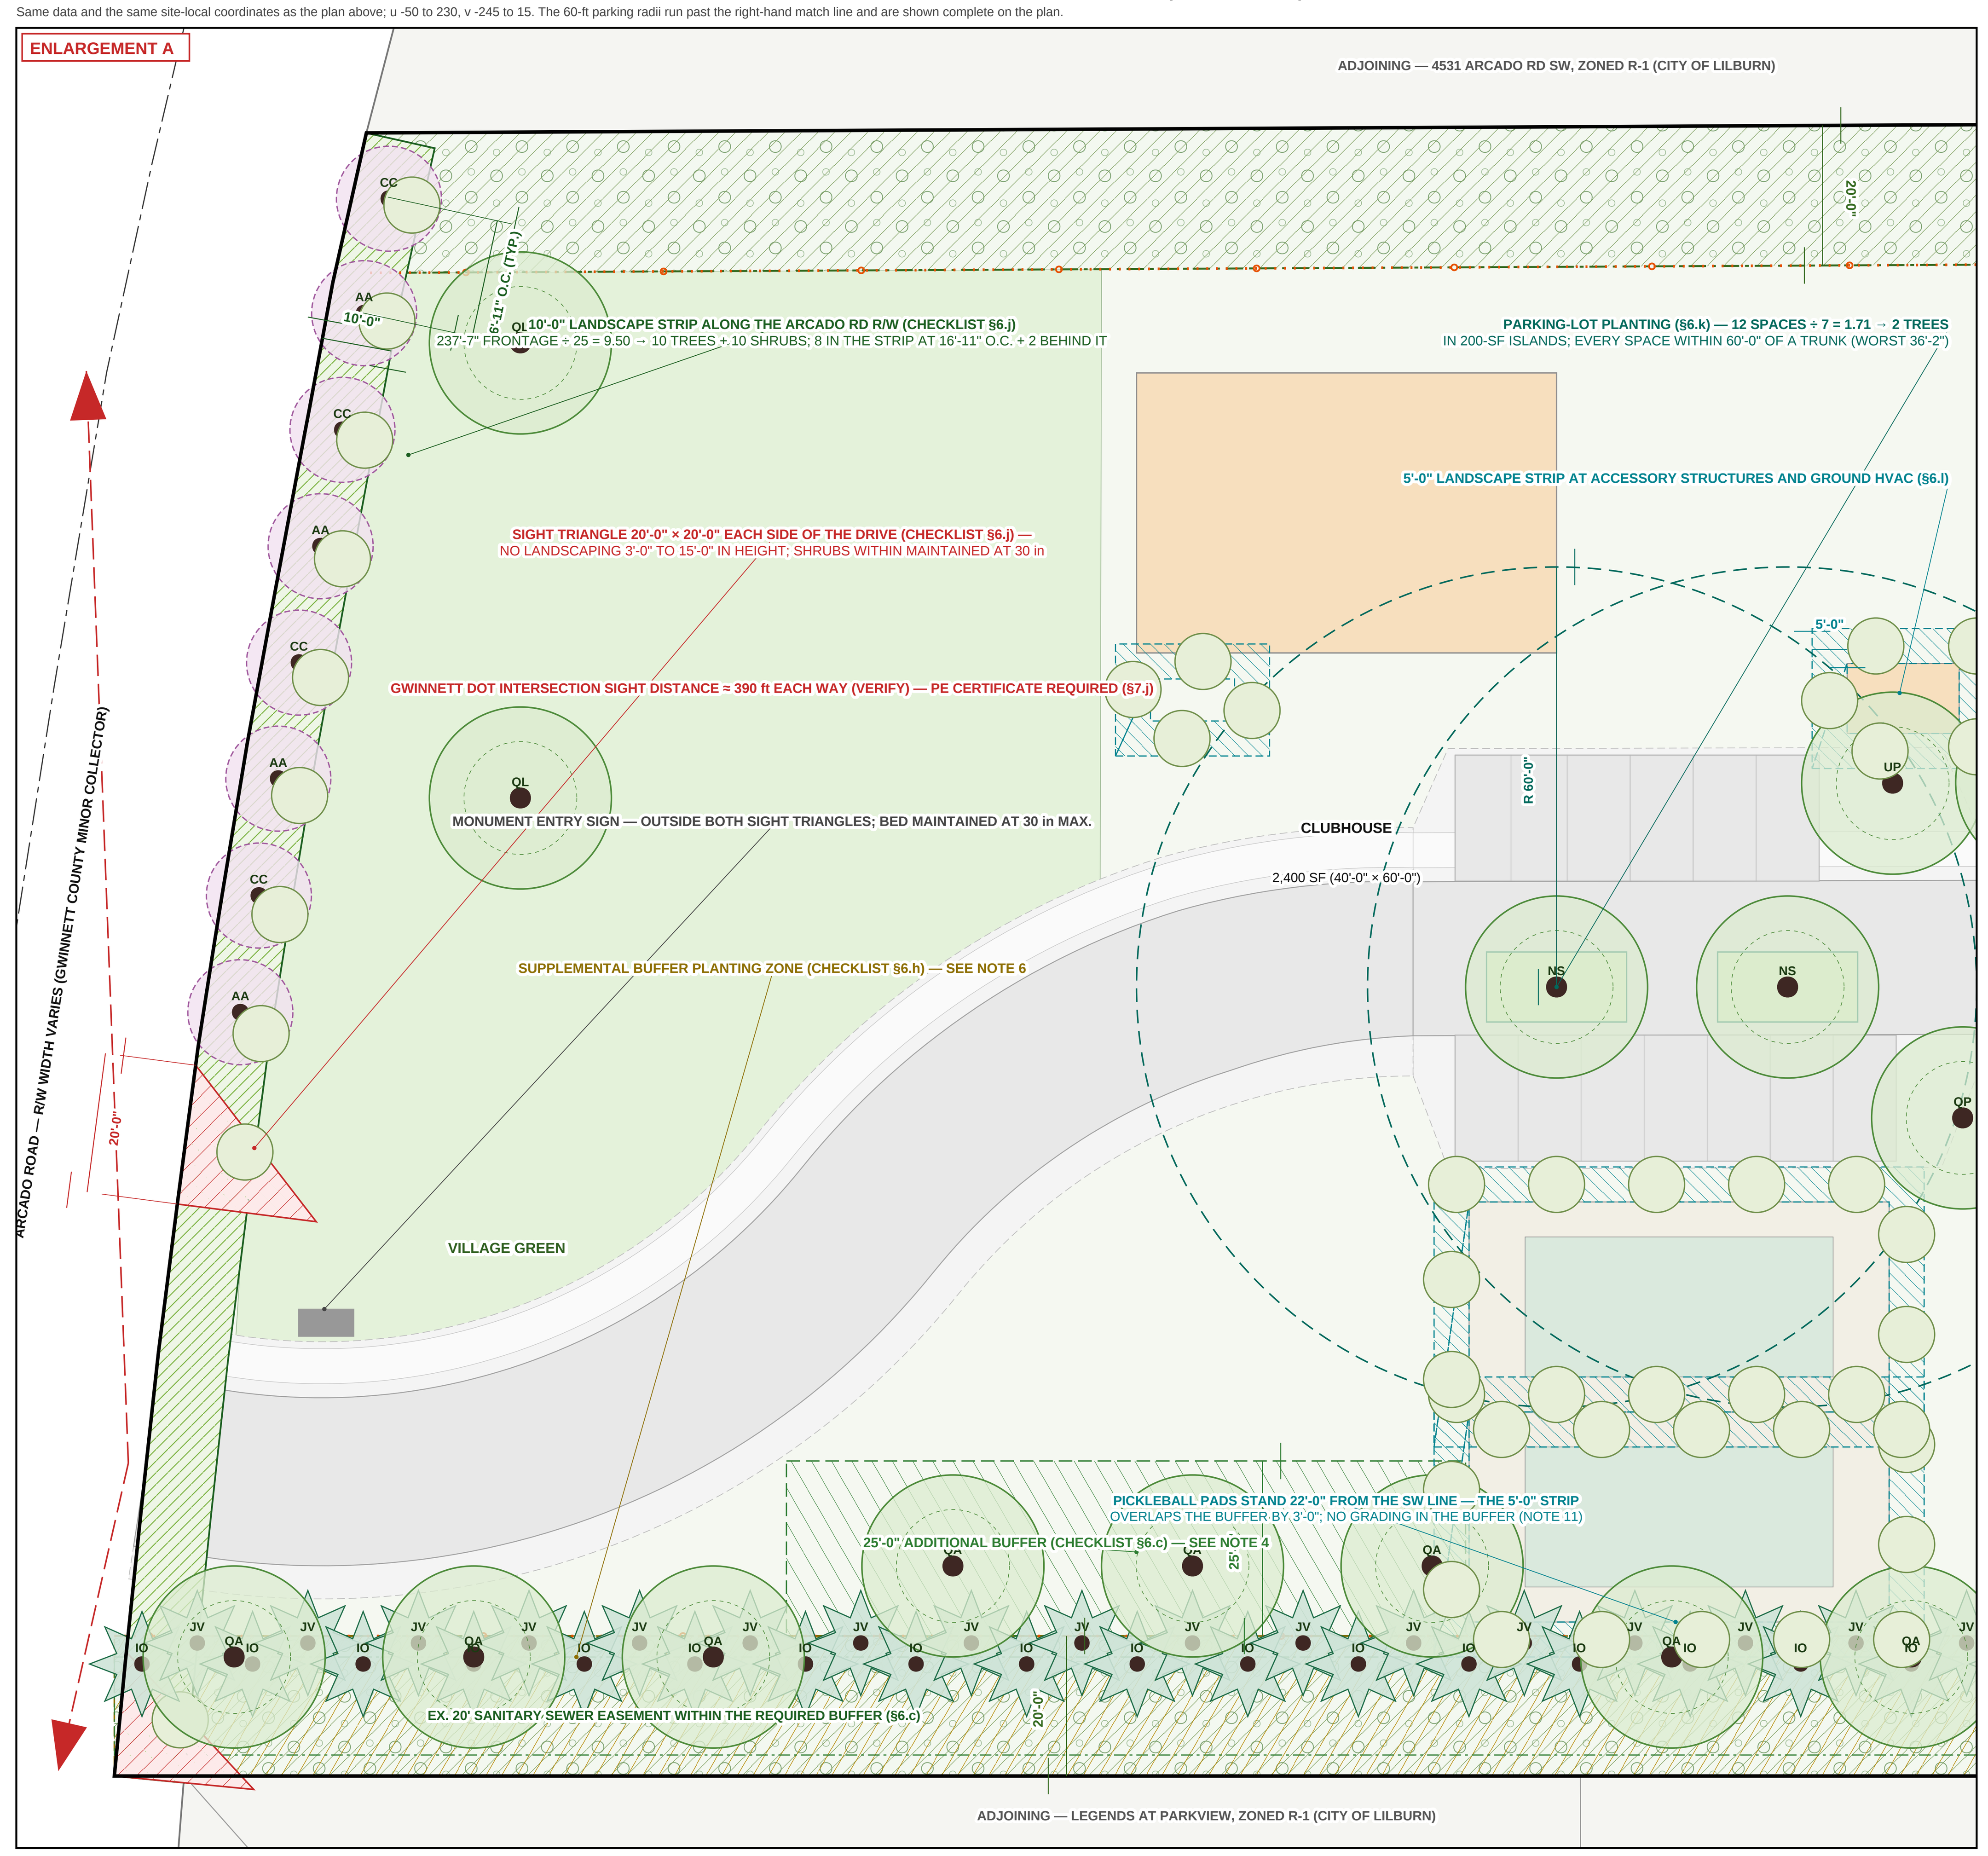

FRONTAGE ARITHMETIC (§6.j): 237'-7" ÷ 25 = 9.50 → 10 trees + 10 shrubs. Drive opening and curb returns 64'-5"; two 20-ft sight triangles 40'-0"; plantable strip 135'-5".
PARKING ARITHMETIC (§6.k): 12 spaces ÷ 7 = 1.71 → 2 trees; worst measured trunk distance 36'-2" against the 60'-0" maximum. Tree Density Units are NOT required of an SFR subdivision (§6.i) —

SOURCES

1. City of Lilburn Site Development Plan Review Checklist, section 6 "Zoning Buffers/Landscape Plan Comments (see Chapter 109 — Environment)", clauses a–n — the clause numbers cited on this sheet (data/site-dev-plan-review-checklist.txt).
2. Lilburn Zoning Ordinance, Ord. 2023-603 — Table 4.1 (20-ft buffer abutting R-1 for dwelling types other than detached single-family), §313(1) (buffer requirements supersede required yards), §602 Use Table.
3. data/layout.json, regenerated 2026-09-03 — boundary ring, 41 lots, lane, amenity block, open-space tracts, detention basins, stream reaches, and metrics.frontage_arcado_along_rw_ft = 237.62 ft. Every quantity on this sheet is computed from that file at run time.
4. docs/12-outline-specifications.md Section 32 93 00 "Plants" — species palette, supplemental-buffer rate (1 evergreen per 8–10 lf plus 1 canopy tree per 30–40 lf), prohibited GA-EPPC Category 1 species, street-tree list and 4-in caliper standard along a public right-of-way.
5. data/plans.json (read at run time, never written) — Plan A body depth, ridge height and lot siting for the typical buffer section. It was regenerated on 2026-09-03, so the patio edge now stands 20'-6" from the rear lot line and the audit's 20.17 ft is stale.
6. audit-2026-09-03/drawing-standards.md §3.1 (the C-7.0 row) and §3.2 (legend discipline); audit-2026-09-03/completeness.md item M9; audit-2026-09-03/site-geometry.md §4.
7. Sheet C-0 EXISTING CONDITIONS — existing wooded area and mown-yard limits (approximate, aerial imagery 2026-09-03), the existing 8-in sanitary sewer and its easement, and the stream and its buffers.
8. Georgia Power "Tree planting near utility lines" right-tree/right-place guide (cited by Checklist §6.n); ANSI Z60.1-2014 nursery stock; ANSI A300 Part 6; UGA Extension "Native Plants for Georgia" Parts I–IV.

GENERAL NOTES — LANDSCAPE, BUFFER AND TREE PROTECTION

1. STATUS AND SEAL. A CONCEPT landscape, buffer and tree-protection plan prepared by the owner for pre-application review of a rezoning from R-1 to R-2. Checklist §6.a requires this plan to be SEALED BY A REGISTERED LANDSCAPE ARCHITECT, FORESTER OR ARBORIST; this sheet is DRAFT — NOT SEALED and is superseded by that sealed plan at the Land Disturbance Permit. Every statement of conformity reads "appears consistent with" and none is a compliance certification.
2. TREE DENSITY UNITS ARE NOT REQUIRED. Checklist §6.i requires 16 Tree Density Units per acre "unless SFR subdivision". This is a single-family-residential subdivision — 41 detached fee-simple cottage lots, Ord. 2023-603 §602 use "Single-family (cluster-cottage, creative lot configuration)", permitted in R-2 without a special-use permit. NO TDU CALCULATION IS REQUIRED AND NONE IS PROVIDED, and no TDU credit is claimed for any plant here, so the clause's bar on counting trees inside required buffers does not arise. The planting data §6.i also requires is in the PLANT SCHEDULE.
3. BUFFER — WIDTH, LABEL AND RECORDING (§6.b). A 20'-0" UNDISTURBED buffer is provided along every property line except the Arcado Rd frontage: 3,725 lineal feet, 73,697 SF, computed as a mitred offset of the boundary ring in data/layout.json. Width is from Ord. 2023-603 Table 4.1, "buffer abutting R-1: 0 ft for detached single-family dwellings in R-2, 20 ft for all other allowed dwelling types" — cottage homes are listed separately from detached single-family there, so this plan designs to the 20-ft buffer and asks the Director to confirm the reading. BUFFER-EASEMENT RECORDING NOTE: within a lot the buffer occupies the rear 20 ft and is held in a RECORDED BUFFER EASEMENT under §313(1) ("buffer requirements ... supersede these minimum required yards"). The easement is granted to the HOA and to the City, shown and dimensioned on the final plat, and RECORDED IN THE GWINNETT COUNTY RECORDS BEFORE THE FIRST CERTIFICATE OF OCCUPANCY; it prohibits clearing, grading, filling, structures, paving, storage, mowing and removal of any living tree except dead, diseased or hazardous material taken by hand under an arborist. Buffer area on lots 41,000 SF (41 × 50 × 20 ft), reported separately from common open space. Every buffered line abuts R-1 residential property (§6.b).
4. BUFFER WITHIN AN EASEMENT — AN OPEN ITEM (§6.c). Checklist §6.c reads "If a portion of required buffer is within an easement, provide 25' additional buffer outside easement." The existing 8-in Gwinnett DWR gravity sewer (Arcado Road Townhomes outfall) runs 7–13 ft inside the SW property line from u ≈ −36 to u ≈ 272, so 308 lineal feet of the required 20-ft buffer lies within that existing sanitary-sewer easement. This plan carries 25'-0" of additional buffer over the 97 lf (u 60–157) where the front amenity tract is clear — 2,425 SF — and states plainly that it CANNOT carry it over the remaining 211 lf: the two pickleball court pads stand 22'-0" from the SW line (u 157–218) and the balance crosses the rear of lot 1 (u 230–272), where an extra 25 ft would leave 55 ft of buildable depth against a 51'-10" body plus a 15-ft front setback. THREE QUESTIONS ARE PUT TO STAFF AT THE PRE-APPLICATION CONFERENCE: (a) does §6.c apply to a pre-existing utility easement the applicant did not create; (b) does the recorded BUFFER easement of §313(1) itself trigger §6.c, which would make the clause self-defeating; and (c) if §6.c applies in full, the applicant will relocate the pads, re-plat lots 1–2, or apply to the Zoning Board of Appeals. No credit is claimed for the 211 lf until staff answers.
5. BUFFER ENCROACHMENTS (§6.f). "Swales, ditches, stormwater facilities/detention ponds, sanitary sewer conveyance facilities, and easements may encroach as near perpendicular as possible, up to max 50' width." As laid out on Sheet C-3.0 NEITHER DETENTION BASIN ENTERS THE BUFFER — Pond 1 top of bank is 41'-5" and Pond 2 28'-7" clear of the SW property line against the 20-ft buffer. The only encroachment on this sheet is the SW curb return at the Arcado Rd entrance, 2'-0" wide over 0.1 SF, perpendicular to the line and far under the 50-ft maximum. No Zoning Board of Appeals buffer variance is requested by this sheet.
6. SUPPLEMENTAL BUFFER PLANTING (§6.h). Supplemental planting is shown only where the existing vegetation does not screen. ONE GAP IS MAPPED — the SW line from u −36 to u 272 (308 lf), where Sheet C-0 shows the mown yard at 4541 Arcado Rd and the maintained sanitary-sewer corridor. Rate from docs/12 §32 93 00 2.03: one evergreen per 8–10 lineal feet of gap plus one canopy tree per 30–40 feet. Provided: 39 evergreens at 8'-0" o.c. in a double staggered row and 9 canopy trees at 34'-3" o.c. ALL SUPPLEMENTAL TREES ARE A MINIMUM 6'-0" IN HEIGHT AT THE TIME OF PLANTING AND REACH A MINIMUM 20'-0" AT MATURITY, as §6.h requires; species and mature heights are tabulated in the PLANT SCHEDULE. Plants are held clear of the 8-in sewer, whose horizontal position must be confirmed by survey and by Georgia 811 before layout. NO TREE SURVEY HAS BEEN PERFORMED: the arborist's buffer inventory (every existing tree over 5-in caliper, and the canopy gaps) governs the final quantity, and a contingency allowance for 25 % of the remaining 3,417 lf of buffer is carried in the estimate but is not drawn. Existing and proposed trees are not labelled for TDU credit because no credit is claimed (§6.h, §6.i).
7. ARCADO ROAD LANDSCAPE STRIP (§6.j) — THE ARITHMETIC. "For each 10-foot LS strip install 1 tree and 1 shrub per 25 linear feet of frontage." Frontage on Arcado Rd = 237.62 lineal feet measured along the right-of-way line (data/layout.json metrics.frontage_arcado_along_rw_ft; the chord is 237.44 ft). 237.62 ÷ 25 = 9.50 → 10 TREES AND 10 SHRUBS REQUIRED. The 10'-0" strip is drawn as a 2,370-SF band inside the R/W. The drive opening with its 25-ft and 15-ft curb returns removes 64'-5" of frontage and the two 20-ft sight triangles remove a further 40'-0", leaving 135'-5" of plantable strip, so 8 of the 10 required trees are set in the strip at 16'-11" on centre and THE REMAINING 2 ARE RELOCATED IMMEDIATELY BEHIND THE STRIP inside the amenity tract, clear of both sight triangles. Approval of that relocation is requested; the alternative is 13'-6" on centre in the strip, which is too close for the mature spread. All 10 shrubs are in the strip.
8. LANE STREET TREES. Street trees stand at 40'-0" on centre along both sides of the private lane, 6'-0" behind the front lot line in an HOA street-tree easement — or, where the lane tract widens from u = 530, in a 6-ft strip between curb and walk (Ord. 2023-603 §319 sidewalk note). 59 TREES ARE SHOWN. A station falling on a driveway apron, a hammerhead leg or a parking bay is shifted along the lane in 6-ft steps; a station falling on a detention-basin embankment (Pond 1, u 780-980; Pond 2, u 1,480-1,680) or within 55 ft of a digitised stream reach is omitted, because nothing is planted on an embankment or inside an undisturbed stream buffer. Species alternate so that no two adjacent cottages face the same tree. Street trees are NOT counted toward the landscape-strip or the parking-lot requirement.
9. SIGHT TRIANGLES (§6.j). "No landscaping 3-15' feet in height within 20 feet of right-of-way intersection." Two 20'-0" × 20'-0" triangles are drawn at the entrance, one each side of the drive, measured from the end of each curb return along the Arcado Rd right-of-way and along the edge of the drive. NO TREE IS PLACED IN EITHER TRIANGLE. The two shrubs that fall inside them are Itea virginica 'Little Henry', 18–24 in at planting and maintained by the HOA at 30 in maximum, so nothing between 3'-0" and 15'-0" in height stands in either triangle. SEPARATELY, the Gwinnett County DOT intersection sight distance for a 35-mph collector is approximately 390 ft in each direction from the driveway (FACTS §2b — VERIFY); those sight lines run far beyond this sheet, are shown by direction only on Enlargement A, and must be certified by a Georgia PE with the driveway permit (Checklist §7.j). The monument entry sign is set outside both triangles.
10. PARKING-LOT PLANTING (§6.k). "If more than 5 parking spaces: provide 1 tree for each 7 parking spaces. Demonstrate visually that every parking space is within 60 feet of the trunk of a tree. Landscape strip and buffer trees do not count toward this requirement." The amenity block has 8 guest spaces (including one van-accessible space and its aisle) and 4 mail-kiosk spaces = 12 spaces; 12 ÷ 7 = 1.71 → 2 TREES REQUIRED. Two canopy trees are provided in two dedicated 200-SF islands between the guest bay and the kiosk bay, and neither is counted anywhere else on this sheet. The 60'-0" radii are drawn about both trunks on the plan and on Enlargement A; the worst measured distance from any stall corner to the nearer trunk is 36'-2". Island area satisfies §6.k.a (canopy tree, 200 SF minimum, not shared).
11. ACCESSORY STRUCTURES AND GROUND-MOUNTED EQUIPMENT (§6.l). A 5'-0" landscape strip is drawn around the mail kiosk (cluster box unit), both pickleball court pads and the clubhouse ground-mounted HVAC pad, planted with 37 evergreen shrubs. Per-cottage ground-mounted condensers are screened by HOA-maintained foundation planting under the same rule; those plants are not tabulated here and are specified in docs/12 §32 93 00. Where the strip at the SW court pad overlaps the 20-ft undisturbed buffer by 3'-0", it is satisfied by the buffer and its supplemental planting and NO GRADING OCCURS IN THE BUFFER.
12. CERTIFICATE OF OCCUPANCY AND WARRANTY (§6.m) — VERBATIM: "No Certificate of Occupancy shall be issued until all requirements of the tree planting have been satisfactorily completed. Plant material shall be warranted by owner or contractor for 12 months from date of CO, or a maintenance bond shall be provided prior to CO or final plat."
13. OVERHEAD UTILITY LINES (§6.n). Checklist §6.n requires a check for utility lines and alternate low or slow-growing trees, or setbacks from overhead power. OVERHEAD DISTRIBUTION ALONG THE ARCADO ROAD FRONTAGE IS NOT RESOLVED IN ANY PUBLIC LAYER USED FOR THIS PACKAGE AND MUST BE FIELD-LOCATED (Georgia 811 and Georgia Power) BEFORE THE STRIP IS LAID OUT. Pending that locate the frontage row is specified as flowering trees of 15'-0"–30'-0" mature height, which sit in the Georgia Power right-tree/right-place low zone, and no canopy tree is placed within 20 ft of the presumed conductor line. Note the tension the sheet does not hide: §6.j asks for a mature height of at least 20 ft while the utility guide asks for no more than about 25 ft under a conductor, so the species must land in that window — or §6.n's utility-hardship variance is requested. If the field locate finds no conductor, the Landscape Architect may substitute 4-in-caliper Willow, Overcup, Nuttall, Pin or Shumard Oak, Lacebark Elm or Japanese Zelkova from the City's street-tree list.
14. TREE PROTECTION (§6.g) — REQUIRED NOTE, VERBATIM: "TREE PROTECTION FENCE MUST BE INSTALLED PRIOR TO COMMENCING LAND DISTURBING ACTIVITIES." The fence line is drawn at the limit of disturbance — the buffer inner line and the outer line of the 50-ft undisturbed stream buffer — 3,972 lineal feet, and DETAIL 1 gives the standard section. The fence is to be installed, inspected by the City and photographed before the pre-construction meeting and maintained until final stabilisation. A reasonable effort will be made to preserve specimen trees and every tree over 5 in in caliper standing in a buffer, landscape strip or parking island; those trees are identified by the tree survey, which has not yet been performed.
15. STREAM BUFFERS — REQUIRED NOTES, VERBATIM (Checklist §9 Buffered State Waters e and f): "STREAM BUFFERS ARE TO REMAIN IN A NATURAL AND UNDISTURBED CONDITION." "STREAM BUFFER SHALL BE STAKED AND PROTECTED PRIOR TO LAND DISTURBANCE." The unnamed order-0 headwater of Jackson Creek (GAR030701030315, Georgia 2024 §303(d) list) and its 25-ft state, 50-ft undisturbed and 75-ft impervious lines are shown from Sheet C-0. TOP OF BANK IS APPROXIMATE — a field delineation by a qualified professional is required and governs, and no plant is placed inside the 50-ft undisturbed buffer. Street-tree stations that fell within 55 ft of a digitised reach were dropped for that reason.
16. SPECIES, STANDARDS AND MAINTENANCE. Palette from docs/12 §32 93 00 2.02: Georgia Piedmont natives and proven adapted cultivars (UGA Extension "Native Plants for Georgia" I–IV). Nursery stock ANSI Z60.1; planting ANSI A300 Part 6 and ISA BMPs; Georgia Department of Agriculture nursery certification. PROHIBITED: every GA-EPPC Category 1 species — Ligustrum, Nandina, Pyrus calleryana, Elaeagnus, Lonicera japonica, Hedera helix, Wisteria sinensis, Vinca. Mulch 3 in, held 3 in clear of every trunk; root barriers at street trees within 5 ft of a walk. All landscape is maintained in perpetuity by the HOA under the recorded covenants: 90-day establishment, 12-month warranty with one replacement, then a professional landscape contract. Temporary establishment irrigation only; none in the buffer.
17. WHAT IS NOT ON THIS SHEET. Per-cottage foundation and porch planting, sod and seeding limits, pond-bank seeding, the tree survey and arborist's buffer inventory, irrigation, landscape lighting, erosion-control matting and the planting estimate — all part of the sealed landscape plan and the LDP submittal. Existing-vegetation limits (Sheet C-0) are approximate, digitised from aerial imagery 2026-09-03.

DETAIL 1 — TREE PROTECTION FENCE (SCALE 3/8" = 1'-0")

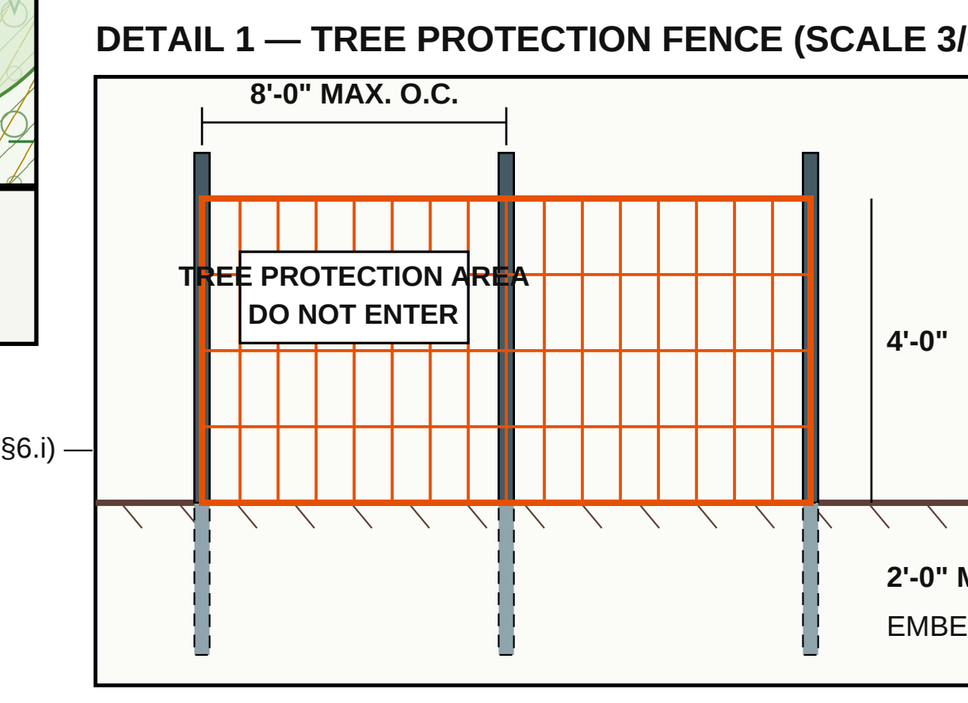

4'-0" high orange high-visibility polyethylene fence on 6'-0" steel T-posts at 8'-0" o.c. maximum, driven 2'-0" minimum, with two tension wires. Set at the limit of disturbance: the buffer inner line, the outer edge of the 50-ft undisturbed stream buffer, and the drip line of every retained tree. Signage every 50 ft, both faces. TREE PROTECTION FENCE MUST BE INSTALLED PRIOR TO COMMENCING LAND DISTURBING ACTIVITIES (Checklist §6.g) — see note 14. Inspected by the City before the pre-construction meeting; maintain until final stabilisation. No storage, parking, washout, burning, trenching or grade change inside the fence.

Disclaimer: This is an AI-generated analysis for preliminary planning purposes. All findings must be verified by a licensed professional before use in design, permitting, or regulatory submissions.

Label: DRAFT / NOT SEALED — every item that must be sealed by a Georgia RLS, PE, architect or landscape architect is shown as a concept only. Statements of conformity read "appears consistent with".

THE COTTAGES AT ARCADO SPRINGS

LANDSCAPE, BUFFER AND TREE PROTECTION CONCEPT — Rezoning R-1 → R-2 (City of Lilburn, Georgia)

4535 / 4537 / 4539 / 4541 Arcado Rd SW, Lilburn, GA 30047 — Land Lot 123, 6th District, Gwinnett County — PINs R6123 033, 015, 014, 162 — 9.44 ac (deeded)

Lilburn Zoning Ordinance 2023-603 §1003-4.6, Table 4.1 and §313(1); City of Lilburn Site Development Plan Review Checklist §6.a–§6.n

APPLICANT / OWNER
Mohammed Awad
4541 Arcado Rd SW, Lilburn GA 30047-3968 (parcels 033, 015); Mendez / Roblero de Leon (parcels 014, 162) — co-applicants, owner signatures required

PREPARED FOR
Pre-application conference, City of Lilburn Planning & Zoning (340 Main St) — rezoning application per Ord. 2023-603 §1003 (2026 Application Instructions)

STATUS
DRAFT — NOT SEALED
CONCEPT — to be sealed by a Registered Landscape Architect, forester or arborist (Site Development Plan Review Checklist §6.a). No tree survey has been performed; existing-vegetation limits are approximate. Quantities are concept quantities for review only.
Generator: tools/sitebase.py + tools/landscape.py

DATE	2026-09-03
SCALE	Scale 1" = 60' (ARCH D 36 × 24 in); enlargements 1" = 20'
DATUM	SR 2240 GA West US-ft; NAVD88
DRAWN	owner-prepared (AI-assisted)
CHECKED	RLS / PE — pending

SHEET
C-7.0
LANDSCAPE, BUFFER AND TREE PROTECTION CONCEPT